


Tubo Bundy Abocardado C/MG Rosca UNF As.SAE 45 Tipo "FLARE" Invertido


T717

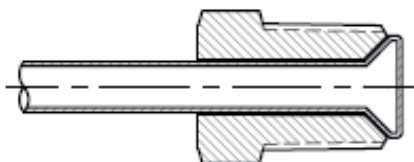

N° Código	Tubo (pulgada)	Rosca UNF As. SAE 45°	Presión de Trabajo (BAR)
01-02	1/8"	5/16"	504
03-03	3/16"	3/8"	336
04-04	1/4"	7/16"	252
05-05	5/16"	1/2"	201
06-06	3/8"	5/8"	168
07-07	7/16"	11/16"	160
08-08	1/2"	3/4"	151
10-10	5/8"	7/8"	120
12-12	3/4"	1 1/16"	105

Tubo Bundy Abocardado C45 C/MG Rosca UNF As.SAE 45 Tipo "FLARE" Invertido


T717A

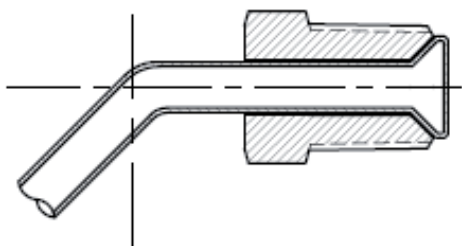

N° Código	Tubo (pulgada)	Rosca UNF As. SAE 45°	Presión de Trabajo (BAR)
01-02	1/8"	5/16"	504
03-03	3/16"	3/8"	336
04-04	1/4"	7/16"	252
05-05	5/16"	1/2"	201
06-06	3/8"	5/8"	168
07-07	7/16"	11/16"	160
08-08	1/2"	3/4"	151
10-10	5/8"	7/8"	120
12-12	3/4"	1 1/16"	105

Tubo Bundy Abocardado C90 C/MG Rosca UNF As.SAE 45 Tipo "FLARE" Invertido

T717B

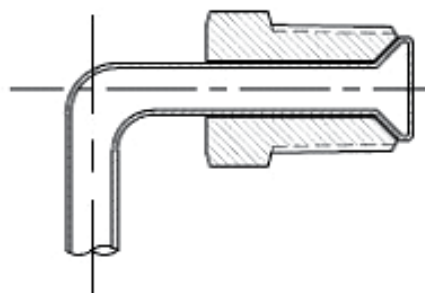

N° Código	Tubo (pulgada)	Rosca UNF As. SAE 45°	Presión de Trabajo (BAR)
01-02	1/8"	5/16"	504
03-03	3/16"	3/8"	336
04-04	1/4"	7/16"	252
05-05	5/16"	1/2"	201
06-06	3/8"	5/8"	168
07-07	7/16"	11/16"	160
08-08	1/2"	3/4"	151
10-10	5/8"	7/8"	120
12-12	3/4"	1 1/16"	105

CONSULTE NUESTRAS BASES DE SERVICIOS

BASE CENTRAL: Obispo San Alberto 3579/71/25 - (C1419FFS) Capital Federal, Argentina • e-mail: info@poberaj.com

Tel.: (5411) 4574-1111 / 4571-2115 / 4572-3271 / 4572-0585 - Fax: (5411) 4573-1948 • www.poberaj.com



PENSAMOS EN SEGURIDAD
TRAZABILIDAD

"Poberaj SA se reserva el derecho de modificar las características y medidas de sus productos sin previo aviso".